

HYDRAULIC CRAWLER CRANE

KOBELCO

CKE2500


Max. Lifting Capacity: 250 t
Max. Boom Length: 91.4 m
Max. Jib Combination: 76.2 + 30.5 m
Max. Luffing Jib Combination: 51.8 + 61.0 m

S P E C I F I C A T I O N S

Main Boom	
Max. Lifting Capacity	250 t/4.0 m
Max. Length	91.4 m
Fixed Jib	
Max. Lifting Capacity	26.8 t/9.8 m
Max. Combination	76.2 m + 30.5 m
Luffing Jib	
Max. Lifting Capacity	70 t/9.8 m
Max. Combination	61.0m + 51.8 m, 51.8 m + 61.0 m
Luffing Angle	63° ~ 88°
Main & Aux. Winch	
Max. Line Speed	110 m/min (1st layer)
Rated Line Pull	132 kN (13.5 tf)
Max. Line Pull	245 kN (25 tf)
Wire Rope	25 mm
Wire Rope Length	480 m (Main) 385 m (Aux.)
Brake Type	Wet-type multiple disc brake
Free-Fall	Option

Working Speed	
Swing Speed	2.1 min ⁻¹ (rpm)
Travel Speed	1.1/0.7 km/h
Power Plant	
Model	Mitsubishi 6D24-TLU2D
Engine Output	235 kW/2,000 min ⁻¹ (rpm)
Fuel Tank Capacity	400 liters
Hydraulic System	
Main Pumps	4 variable displacement
Max. Pressure	30.9 MPa (315 kgf/cm ²)
Hydraulic Tank Capacity	550 liters
Self-Erection Device	
	Standard
Weight	
Operating Weight	Approx. 208 t
Counterweight	80.6 t (Upper), 20.0 t (Lower)
Transport Weight	44.9 t (Main machine)
Ground Pressure	95 kPa (0.97 kgf/cm ²)

GENERAL DIMENSIONS

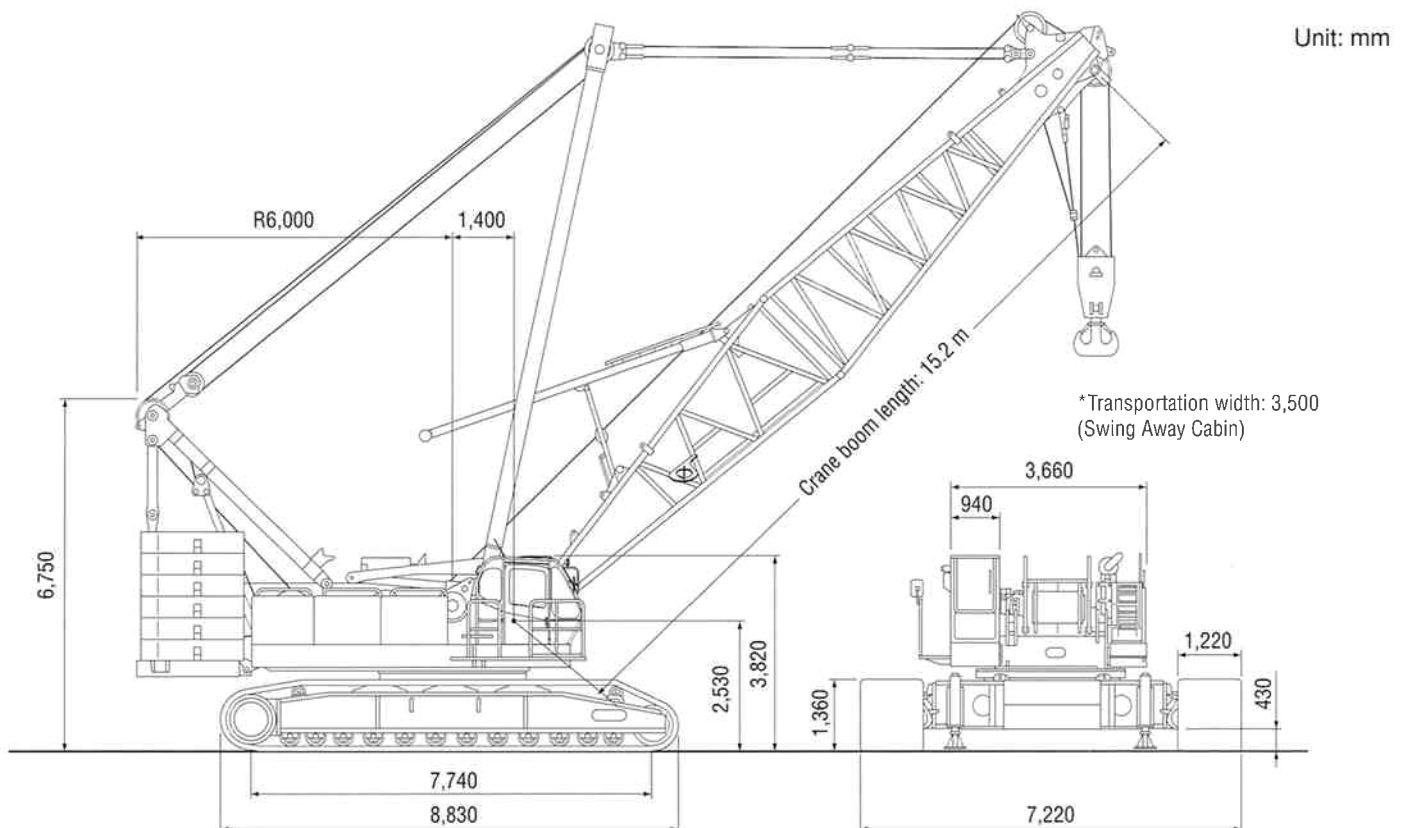

KOBELCO CRANES CO., LTD.

MAIN BOOM LIFTING CAPACITY

Rated loads in metric tons for 360° working area (Counterweight: 80.6 t, Carbody weight: 20.0 t)

Crawlers fully extended

Boom length m (ft)	15.2 (50)	18.3 (60)	21.3 (70)	24.4 (80)	27.4 (90)	30.5 (100)	33.5 (110)	36.6 (120)	39.6 (130)	42.7 (140)	45.7 (150)	48.8 (160)	51.8 (170)	54.9 (180)	57.9 (190)	61.0 (200)	64.0 (210)	67.1 (220)	70.1 (230)	73.2 (240)	76.2 (250)	79.2 (260)	82.3 (270)	85.3 (280)	88.4 (290)	91.4 (300)		
4.0	4.0/25.0	4.7/28.5																										
5.0	199.7	199.7	5.2/188.4	5.6/176.4																								
6.0	167.7	167.7	167.7	166.7																								
7.0	144.2	144.2	144.2	144.2	143.2	141.3	7.1/139.4	7.5/130.3																				
8.0	127.2	127.2	127.2	126.2	126.2	126.2	124.4	124.3	8.0/122.9	8.5/109.2																		
9.0	112.2	112.2	113.2	113.2	112.2	111.2	111.0	110.8	109.0	105.9	9.0/103.0	9.5/95.1	9.9/86.6															
10.0	101.3	101.2	101.2	101.2	101.2	100.2	100.0	99.8	97.3	94.7	92.3	90.0	87.6	10.4/82.7	10.9/77.1	11.4/72.0	11.8/67.6											
12.0	83.7	83.7	83.7	83.7	83.7	83.7	83.4	81.7	79.7	77.8	76.0	74.4	72.5	71.0	69.3	68.0	66.4	12.3/63.5	12.8/59.8	13.3/56.4	13.7/53.5							
14.0	69.7	69.7	69.7	69.7	69.7	69.7	69.7	68.8	67.3	65.8	64.3	63.0	61.6	60.4	59.0	57.9	56.6	55.4	54.3	53.2	52.2	14.2/50.4	14.7/47.7	15.2/45.2	15.7/38.9	16.1/34.9		
16.0	14.8/65.7	60.7	59.7	59.2	59.2	59.2	59.0	58.0	56.7	55.5	54.5	53.2	52.2	51.0	50.2	49.1	48.1	47.2	46.3	45.4	44.5	43.5	42.6	41.7	40.8	39.9	39.0	
18.0		17.5/54.1	50.7	50.7	50.7	50.7	50.3	50.3	50.0	49.7	48.6	47.8	46.7	45.8	44.8	44.1	43.1	42.2	41.4	40.7	39.9	39.1	38.2	37.5	36.8	31.9		
20.0			45.0	44.7	44.3	44.0	43.6	43.6	43.3	43.0	42.8	42.4	41.4	40.6	39.7	39.1	38.3	37.4	36.8	36.1	35.4	34.7	33.9	33.2	32.5	29.1		
22.0			20.1/44.7	39.5	39.1	38.8	38.4	38.4	38.1	37.8	37.5	37.3	37.0	36.4	35.5	35.0	34.2	33.5	32.9	32.2	31.7	31.0	30.2	29.6	28.9	26.6		
24.0				22.7/37.9	34.9	34.6	34.1	34.1	33.8	33.5	33.2	33.1	32.7	32.5	32.0	31.6	30.8	30.1	29.6	29.0	28.5	27.8	27.1	26.6	25.9	24.5		
26.0					25.4/32.5	31.1	30.7	30.7	30.3	30.0	29.7	29.6	29.2	29.0	28.7	28.6	27.9	27.3	26.7	26.2	25.8	25.1	24.5	24.0	23.3	22.5		
28.0						28.0/28.2	27.8	27.7	27.4	27.1	26.8	26.6	26.3	26.1	25.7	25.7	25.3	24.8	24.3	23.8	23.4	22.8	22.2	21.7	21.1	20.5		
30.0							25.3	25.3	24.9	24.6	24.3	24.1	23.8	23.6	23.2	23.1	22.8	22.5	22.2	21.7	21.3	20.8	20.2	19.7	19.1	18.6		
32.0							30.7/24.5	23.1	22.8	22.4	22.1	22.0	21.6	21.4	21.0	21.0	20.6	20.3	20.1	19.9	19.5	18.9	18.4	17.9	17.4	16.9		
34.0								33.3/22.0	20.9	20.6	20.3	20.1	19.7	19.5	19.1	19.1	18.7	18.4	18.2	18.0	17.8	17.3	16.8	16.4	15.8	15.3		
36.0									35.9/19.4	19.0	18.7	18.5	18.1	17.9	17.5	17.4	17.1	16.8	16.6	16.4	16.2	15.9	15.3	14.9	14.4	13.9		
38.0										17.6	17.2	17.1	16.7	16.4	16.1	16.0	15.6	15.3	15.1	14.9	14.7	14.5	14.0	13.7	13.2	12.7		
40.0										38.6/17.2	16.0	15.8	15.4	15.2	14.8	14.7	14.3	14.0	13.8	13.6	13.4	13.2	12.8	12.5	12.0	11.5		
42.0											41.2/15.3	14.7	14.3	14.0	13.6	13.5	13.2	12.9	12.6	12.5	12.3	12.0	11.6	11.4	11.0	10.5		
44.0												43.8/13.7	13.2	13.0	12.6	12.5	12.1	11.8	11.6	11.4	11.2	10.9	10.6	10.4	10.0	9.6		
46.0													12.3	12.1	11.7	11.6	11.2	10.9	10.7	10.5	10.3	10.0	9.6	9.4	9.1	8.7		
48.0													46.5/12.1	11.2	10.8	10.7	10.3	10.0	9.8	9.6	9.4	9.1	8.8	8.6	8.2	7.9		
50.0														49.1/10.8	10.1	9.9	9.6	9.3	9.0	8.8	8.6	8.3	8.0	7.8	7.4	7.1		
52.0															51.8/9.5	9.2	8.9	8.6	8.3	8.1	7.9	7.6	7.2	7.0	6.7	6.4		
54.0																8.6	8.2	7.9	7.6	7.4	7.2	6.9	6.6	6.4	6.0	5.7		
56.0																54.4/8.5	7.6	7.3	7.0	6.8	6.6	6.3	6.0	5.8	5.4	5.1		
58.0																	57.0/7.4	6.8	6.5	6.3	6.0	5.7	5.4	5.2	4.8	4.6		
60.0																		59.7/6.3	6.0	5.8	5.5	5.2	4.9	4.7	4.3	4.0		
62.0																			5.5	5.3	5.0	4.7	4.4	4.2	3.8	3.5		
64.0																				62.3/5.4	4.8	4.6	4.3	3.9	3.7	3.4	3.1	
66.0																					65.0/4.6	4.1	3.8	3.5	3.3	2.9	2.6	
68.0																						67.6/3.8	3.5	3.1	2.9	2.5	2.2	
70.0																							3.1	2.7	2.5	2.2	1.9	
72.0																								70.2/3.1	2.4	2.2	1.8	1.5
74.0																									72.9/2.2	1.9	1.5	1.2
76.0																										75.5/1.6	1.2	76.0/0.9
78.0																											0.9	
80.0																											78.2/0.9	

- Note: 1. Rating according to DIN 15018-3 and prEN 13300.
 2. Rating shown in are determined by the strength of the boom or other structural components.
 3. Instruction in the operator's manual must be strictly observed when operating the machine.

FIXED JIB LIFTING CAPACITY

(counterweight: 80.6 t, carbodyweight: 20.0 t, without main hook)

Jib Offset Angle: 10°

Boom length	27.4 m		51.8 m		76.2 m		
	Jib length	12.2 m	30.5 m	12.2 m	30.5 m	12.2 m	30.5 m
9.0 m	9.8 m/26.8						
10.0 m	26.8						
12.0 m	25.5		13.6 m/26.8				
14.0 m	24.3		26.8				
16.0 m	23.0	16.0 m/6.9	25.9		17.4 m/26.8		
18.0 m	21.8	6.5	25.1	19.8 m/6.9	26.7		
20.0 m	20.7	6.2	24.4	6.9	26.1		
22.0 m	19.8	5.9	23.5	6.6	25.5	23.6 m/6.8	
24.0 m	18.9	5.6	22.8	6.3	24.9	6.8	
26.0 m	18.1	5.3	22.1	6.1	24.4	6.6	
28.0 m	17.3	5.1	21.5	5.9	23.9	6.4	
30.0 m	16.7	4.9	20.9	5.7	21.7	6.2	
34.0 m	15.5	4.5	19.7	5.3	18.3	5.9	
38.0 m	37.1 m/14.5	4.1	17.7	5.0	15.5	5.6	
42.0 m		3.8	15.2	4.7	13.0	5.3	
46.0 m		3.5	13.1	4.4	10.9	5.0	
50.0 m		3.2	11.4	4.1	9.2	4.8	
54.0 m		3.0	10.0	3.9	7.8	4.5	
58.0 m		54.6 m/3.0	8.8	3.7	6.5	4.3	
62.0 m			58.3 m/8.7	3.5	5.5	4.1	
66.0 m				3.3	4.6	3.9	
70.0 m				3.2	3.7	3.8	
74.0 m				3.0	3.0	3.6	
78.0 m				75.7 m/3.0	2.4	3.5	
82.0 m					79.3 m/2.2	3.0	
86.0 m						2.5	
90.0 m						2.0	
94.0 m						1.5	
98.0 m						96.8 m/1.2	

Jib Offset Angle: 30°

Boom length	27.4 m		51.8 m		76.2 m		
	Jib length	12.2 m	30.5 m	12.2 m	30.5 m	12.2 m	30.5 m
12.0 m	13.5 m/19.5						
14.0 m	19.3						
16.0 m	18.7			17.3 m/19.4			
18.0 m	17.9			19.3			
20.0 m	16.8			18.9		21.1 m/19.3	
22.0 m	15.9			18.5		19.2	
24.0 m	15.2	25.3 m/4.2		18.0		18.9	
26.0 m	14.5	4.1		17.3		18.7	
28.0 m	13.9	4.0		16.7	29.1 m/4.2	18.4	
30.0 m	13.4	3.8		16.2	4.1	18.0	32.9 m/4.1
34.0 m	12.7	3.5		15.2	3.9	17.0	4.1
38.0 m	37.8 m/12.4	3.3		14.4	3.7	16.2	3.9
42.0 m		3.1		13.7	3.5	13.6	3.7
46.0 m		2.9		13.2	3.3	11.5	3.6
50.0 m		2.8		11.7	3.2	9.7	3.4
54.0 m		2.7		10.2	3.0	8.2	3.3
58.0 m		56.4 m/2.7		8.9	2.9	6.9	3.2
62.0 m				59.0 m/8.6	2.8	5.8	3.1
66.0 m					2.8	4.8	3.0
70.0 m					2.7	3.9	2.9
74.							

LUFFING JIB LIFTING CAPACITY (Boom Angle Fixed Type 88° and 83°)

Boom length	21.3 m												24.4 m												
	24.4 m		30.5 m		36.6 m		42.7 m		51.8 m		61.0 m		24.4 m		30.5 m		36.6 m		42.7 m		51.8 m		61.0 m		
	88°	83°	88°	83°	88°	83°	88°	83°	88°	83°	88°	83°	88°	83°	88°	83°	88°	83°	88°	83°	88°	83°	88°	83°	
12.0 m	61.4		61.4											61.4		61.4									
14.0 m	55.1		55.1		40.5									55.4		55.4		40.5							
16.0 m	47.5	53.8	47.8		40.2		29.6							47.9	53.2	48.2		40.4		29.6					
18.0 m	40.0	47.3	40.3	47.4	37.2		27.7		17.7					40.3	46.8	40.6	46.4	37.3		27.7		17.8			
20.0 m	34.4	39.9	34.7	40.7	34.6	37.1	25.6		16.3		9.8			34.6	40.7	34.9	41.2	34.7	37.6	25.7		16.4		9.8	
22.0 m	30.0	34.4	30.3	35.0	31.2	34.6	23.8	24.6	15.1		9.1			30.2	35.3	30.5	35.9	31.4	35.0	23.9	24.9	15.2		9.1	
24.0 m	26.5	30.0	26.8	30.6	27.6	31.2	22.2	23.0	14.1	15.1	8.4			26.6	30.7	26.9	31.3	27.7	31.9	22.3	23.2	14.1		8.4	
26.0 m		26.5	23.9	27.1	24.6	27.6	20.9	21.5	13.1	14.0	7.8				27.1	24.0	27.7	24.7	28.1	20.9	21.8	13.1	14.2	7.8	
28.0 m		22.9	21.5	24.2	22.2	24.6	19.6	20.2	12.3	13.1	7.2	7.8			24.0	21.6	24.7	22.3	25.1	19.7	20.5	12.3	13.2	7.2	7.8
30.0 m			19.5	21.8	20.1	22.2	18.5	19.1	11.5	12.3	6.7	7.2				19.5	22.2	20.2	22.6	18.6	19.3	11.5	12.4	6.7	7.3
34.0 m				17.3	16.7	18.3	16.6	17.1	10.2	10.8	5.5	6.2					18.1	16.8	18.6	16.7	17.3	10.2	10.9	5.5	6.3
38.0 m					13.1	15.4	14.1	15.5	9.1	9.6	4.2	4.8						13.3	15.6	14.1	15.7	9.1	9.7	4.2	4.9
42.0 m							11.9	13.3	8.1	8.6	3.2	3.7							12.1	13.5	8.1	8.7	3.2	3.8	
46.0 m								11.0	7.4	7.8	2.3	2.7								11.5	7.4	7.8	2.3	2.8	
50.0 m									6.7	7.0		1.8									6.7	7.1		1.9	
54.0 m										6.5												6.5			

Boom length	30.5 m												36.6 m												
	24.4 m		30.5 m		36.6 m		42.7 m		51.8 m		61.0 m		24.4 m		30.5 m		36.6 m		42.7 m		51.8 m		61.0 m		
	88°	83°	88°	83°	88°	83°	88°	83°	88°	83°	88°	83°	88°	83°	88°	83°	88°	83°	88°	83°	88°	83°	88°	83°	
12.0 m	61.4													53.5											
14.0 m	56.1		53.5		40.5									53.5		53.5		40.5							
16.0 m	48.8	51.8	49.1		40.5		29.6							49.6	49.4	49.2		40.5		29.7					
18.0 m	40.9	46.2	41.2	44.3	37.6		27.9		17.9					41.5	44.1	41.8		37.8		28.1		18.0			
20.0 m	35.1	41.6	35.3	40.0	34.9	38.5	25.8		16.5					35.5	39.8	35.8	38.2	35.1		26.0		16.6			
22.0 m	30.5	36.7	30.8	36.4	31.8	35.0	24.0	25.6	15.3		9.1			30.8	36.3	31.1	34.8	32.2	33.5	24.1		15.3		9.2	
24.0 m	26.9	32.2	27.2	32.8	28.0	32.1	22.4	23.8	14.2		8.5			27.1	32.9	27.4	31.9	28.3	30.7	22.5	24.4	14.2		8.5	
26.0 m	23.3	28.2	24.2	28.8	25.0	29.4	21.0	23.3	13.2	14.6	7.8			23.9	29.5	24.4	29.5	25.2	28.3	21.1	22.8	13.3	14.9	7.9	
28.0 m		25.0	21.7	25.6	22.4	26.1	19.7	20.9	12.3	13.6	7.3	8.1			26.0	21.9	26.7	22.6	26.3	19.8	21.3	12.4	13.9	7.3	
30.0 m			19.6	23.0	20.3	23.4	18.6	19.7	11.5	12.7	6.8	7.5			23.1	19.7	23.8	20.4	24.3	18.7	20.1	11.6	12.9	6.8	7.7
34.0 m				18.7	16.9	19.2	16.7	17.6	10.2	11.1	5.6	6.5				19.4	17.0	19.8	16.7	17.9	10.2	11.4	5.6	6.6	
38.0 m					13.7	16.1	14.2	15.9	9.1	9.9	4.3	5.1					14.1	16.5	14.2	16.2	9.1	10.0	4.3	5.4	
42.0 m							12.1	13.9	8.2	8.8	3.2	3.9						13.9	12.1	14.2	8.2	9.0	3.2	4.1	
46.0 m								11.9	7.4	7.9	2.3	2.9								12.2	7.4	8.0	2.3	3.1	
50.0 m									6.7	7.2		2.0									6.7	7.3		2.2	
54.0 m										6.5												6.6			

Boom length	42.7 m												48.8 m												
	24.4 m		30.5 m		36.6 m		42.7 m		51.8 m		61.0 m		24.4 m		30.5 m		36.6 m		42.7 m		51.8 m		61.0 m		
	88°	83°	88°	83°	88°	83°	88°	83°	88°	83°	88°	83°	88°	83°	88°	83°	88°	83°	88°	83°	88°	83°	88°	83°	
12.0 m	53.5													40.5											
14.0 m	53.5		52.0											40.5											
16.0 m	49.4		47.3		39.9		29.7							40.5		40.5		37.2		29.7					
18.0 m	42.2	42.0	42.4		38.1		28.3							40.5	39.9	40.5		36.9		28.5					
20.0 m	36.0	37.9	36.2	36.4	35.3		26.1		16.7					36.5	36.1	36.7	34.6	35.5		26.3		16.8			
22.0 m	31.2	34.6	31.5	33.2	32.5	31.9	24.3		15.4		9.3			31.5	33.0	31.8	31.6	32.5	30.4	24.4		15.5		9.3	
24.0 m	27.4	31.8	27.7	30.4	28.6	29.3	22.6	25.0	14.3		8.6			27.6	30.3	27.9	29.0	28.9	27.9	22.7	25.7	14.4		8.6	
26.0 m	24.2	29.4	24.6	28.1	25.4	27.0	21.2	23.3	13.3		7.9			24.4	28.1	24.8	26.8	25.7	25.7	21.3	23.9	13.4		7.7	
28.0 m		26.8	22.0	26.1	22.8	25.1	19.9	21.8	12.4	14.2	7.4				26.1	22.2	24.9	23.0	23.9	20.0	22.3	12.5	14.6	6.6	
30.0 m		24.3	19.8	24.4	20.6	23.4	18.7	20.5	11.6	13.2	6.8	7.9			24.2	19.9	23.2	20.8	22.2	18.8	20.9	11.7	13.6	5.7	
34.0 m			20.0	17.1	20.5	16.8	18.2	10.3	11.6	5.7	6.8					20.5	17.2	19.5	16.8	18.6	10.3	11.8	4.1	7.0	
38.0 m				14.3	17.0	14.3	16.4	9.1	10.2	4.4	5.6					16.9	14.4	17.4	14.3	16.5	9.2	10.4	2.7	5.8	
42.0 m					14.3	12.2	14.6	8.2	9.1	3.3	4.3							14.7	12.2	14.8	8.2	9.3		4.5	
46.0 m							12.5	7.4	8.2	2.3	3.2									12.8	7.4	8.3		3.4	
50.0 m								6.7	7.4		2.3										6.7	7.5		2.4	
54.0 m									6.1	6.7												6.1	6.8		
58.0 m																							6.2		

Boom length	54.9 m												61.0 m											
	24.4 m		30.5 m		36.6 m		42.7 m		51.8 m		30.5 m		36.6 m		42.7 m		51.8 m							
	88°	83°	88°	83°	88°	83°	88°	83°	88°	83°	88°	83°	88°	83°	88°	83°	88°	83°						
14.0 m	40.5		40.5								33.5													
16.0 m	40.2		39.7		32.2						30.2		26.8											
18.0 m	36.7		36.2		31.6		26.8				27.5		26.8		25.4									
20.0 m	33.8	34.3	33.3		30.9		26.5		16.9		25.3		24.9		24.5		17.0							
22.0 m	31.3	31.3	30.8	29.9	30.0		24.5		15.6		23.3	28.2	23.0		22.6		15.7							
24.0 m	28.3	28.8	28.6	27.5	27.9	26.4	22.8		14.5		21.7	25.8	21.3	24.6		20.9		14.5						
26.0 m	25.0	26.6	25.4	25.4	25.9	24.4	21.4	24.3	13.4		20.2	23.7	19.8	22.7	19.4	22.4	13.5							
28.0 m	20.7	24.8	22.7	23.6	23.2	22.6	20.0	22.6	12.5	15.0	19.0	22.0	18.5	21.1	18.1	20.7	12.6							
30.0 m		23.2	20.4	22.0	20.9	21.1	18.9	21.1	11.7	13.9	17.9	20.4	17.4	19.6	17.0	19.3	11.8	14.2						
34.0 m			15.6	19.4	17.3	18.5	16.9	18.5	10.3	12.1	16.3	17.9	15.5	17.3	15.0	16.8	10.4	12.4						
38.0 m				17.5	14.5	16.5	14.4	16.5	9.2	10.6		16.1	14.1	15.4	13.5	14.9	9.2	10.8						
42.0 m					14.9	12.3	14.8	8.2	9.4			13.9	12.2	13.4	8.2	9.6		</						

BOOM & JIB ARRANGEMENT

CRANE BOOM ARRANGEMENT

Boom length m (ft)	Boom arrangement
15.2 (50)	Base-Tip
18.3 (60)	Base-A-Tip
21.3 (70)	Base-A-A-Tip, Base-B-Tip
24.4 (80)	Base-A-B-Tip
27.4 (90)	Base-A-A-B-Tip, Base-D-Tip, Base-B-B-Tip
30.5 (100)	Base-A-B-B-Tip, Base-A-D-Tip
33.5 (110)	Base-A-A-B-B-Tip, Base-A-A-D-Tip, Base-B-D-Tip
36.6 (120)	Base-A-B-D-Tip
39.6 (130)	Base-A-A-B-D-Tip, Base-D-D-Tip, Base-B-B-D-Tip
42.7 (140)	Base-A-B-B-D-Tip, Base-A-D-D-Tip
45.7 (150)	Base-A-A-B-B-D-Tip, Base-A-A-D-D-Tip, Base-B-D-D-Tip
48.8 (160)	Base-A-B-D-D-Tip
51.8 (170)	Base-A-A-B-D-D-Tip, Base-B-B-D-D-Tip, Base-D-D-D-Tip
54.9 (180)	Base-A-B-B-D-D-Tip, Base-A-D-D-D-Tip
57.9 (190)	Base-A-A-B-B-D-D-Tip, Base-A-A-D-D-D-Tip, Base-B-D-D-D-Tip
61.0 (200)	Base-A-B-D-D-D-Tip
64.0 (210)	Base-A-A-B-D-D-D-Tip, Base-B-B-D-D-D-Tip, Base-D-D-D-D-Tip
67.1 (220)	Base-A-B-B-D-D-D-Tip, Base-A-D-D-D-D-Tip
70.1 (230)	Base-A-A-B-B-D-D-D-Tip, Base-A-A-D-D-D-D-Tip, Base-B-D-D-D-D-Tip
73.2 (240)	Base-A-B-D-D-D-D-Tip
76.2 (250)	Base-A-A-B-D-D-D-D-Tip, Base-B-B-D-D-D-D-Tip, Base-D-D-D-D-D-Tip
79.3 (260)	Base-A-B-B-D-D-D-D-Tip, Base-A-D-D-D-D-D-Tip
82.3 (270)	Base-A-A-B-B-D-D-D-D-Tip, Base-A-A-D-D-D-D-D-Tip, Base-B-D-D-D-D-D-Tip
85.3 (280)	Base-A-B-D-D-D-D-D-Tip
88.4 (290)	Base-A-A-B-B-D-D-D-D-D-Tip, Base-B-B-D-D-D-D-D-Tip
91.4 (300)	Base-A-B-B-D-D-D-D-D-Tip

Base Boom Length and Boom Tip Length
Base = 7.8 m (25'), Tip = 8.3 m (27')
Insert Boom
A = 3.0 m (10'), B = 6.1 m (20'), D = 12.2 m (40')

FIXED JIB ARRANGEMENT

Jib length m (ft)	Jib arrangement
12.2 (40)	Base-A-Tip
18.3 (60)	Base-A-B-Tip
24.4 (80)	Base-A-B-B-Tip
30.5 (100)	Base-A-B-B-B-Tip

Base Jib Length and Jib Tip Length
Base = 7.8 m (25'), Tip = 8.3 m (27')
Insert Jib
A = 3.0 m (10'), B = 6.1 m (20')

LUFFING BOOM ARRANGEMENT

Boom length m (ft)	Boom arrangement
21.3 (70)	Base-A-B-Cap
24.4 (80)	Base-A-A-B-Cap, Base-B-B-Cap, Base-D-Cap
27.4 (90)	Base-A-B-B-Cap, Base-A-D-Cap
30.5 (100)	Base-A-A-B-B-Cap, Base-A-A-D-Cap, Base-B-D-Cap
33.5 (110)	Base-A-B-D-Cap
36.6 (120)	Base-A-A-B-D-Cap, Base-B-B-D-Cap, Base-D-D-Cap
39.6 (130)	Base-A-B-B-D-Cap, Base-A-D-D-Cap
42.7 (140)	Base-A-A-B-B-D-Cap, Base-A-A-D-D-Cap, Base-B-D-D-Cap
45.7 (150)	Base-A-B-D-D-Cap
48.8 (160)	Base-A-A-B-B-D-D-Cap, Base-B-B-D-D-Cap, Base-D-D-D-Cap
51.8 (170)	Base-A-B-B-B-D-D-Cap, Base-A-D-D-D-Cap
54.9 (180)	Base-A-A-B-B-B-D-D-Cap, Base-B-B-D-D-D-Cap, Base-A-A-D-D-D-Cap
57.9 (190)	Base-A-B-B-D-D-D-Cap
61.0 (200)	Base-A-A-B-B-D-D-D-Cap, Base-B-B-B-D-D-D-Cap

Base Boom Length and Luffing Boom Cap Length
Base = 7.8 m (25'), Cap = 8.3 m (27')
Insert Luffing Boom
A = 3.0 m (10'), B = 6.1 m (20'), D = 12.2 m (40')


LUFFING JIB ARRANGEMENT

Jib length m (ft)	Jib arrangement
21.3 (70)	Base-A-B-Tip
24.4 (80)	Base-A-A-B-Tip, Base-B-B-Tip, Base-D-Tip
27.4 (90)	Base-A-B-B-Tip, Base-A-D-Tip
30.5 (100)	Base-A-A-B-B-Tip, Base-B-B-Tip, Base-A-A-D-Tip
33.5 (110)	Base-A-B-D-Tip
36.6 (120)	Base-A-A-B-D-Tip, Base-B-B-D-Tip, Base-D-D-Tip
39.6 (130)	Base-A-B-B-D-Tip, Base-A-D-D-Tip
42.7 (140)	Base-A-A-B-B-D-Tip, Base-B-B-D-Tip, Base-A-A-D-D-Tip
45.7 (150)	Base-A-B-D-D-Tip
48.8 (160)	Base-A-A-B-B-D-D-Tip, Base-B-B-B-D-D-Tip
51.8 (170)	Base-A-B-B-B-D-D-Tip
54.9 (180)	Base-A-A-B-B-B-D-D-Tip, Base-A-A-D-D-D-Tip, Base-B-B-D-D-D-Tip
57.9 (190)	Base-A-B-B-B-D-D-D-Tip
61.0 (200)	Base-A-A-B-B-B-D-D-D-Tip


Base Luffing Jib Length and Luffing Jib Tip Length
Base = 7.8 m (25'), Tip = 8.3 m (27')
Insert Luffing Jib
A = 3.0 m (10'), B = 6.1 m (20'), D = 12.2 m (40')

WORKING RADIUS

CRANE BOOM

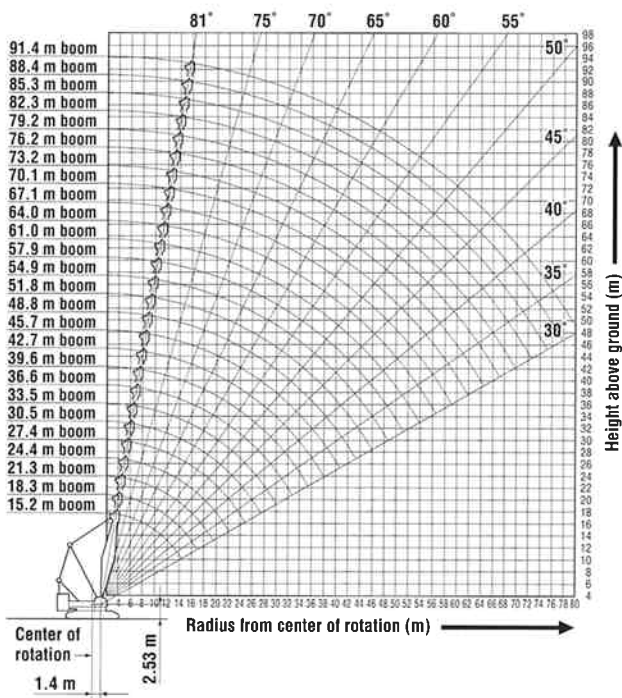


FIXED JIB (Jib Offset Angle: 10°, 30°)

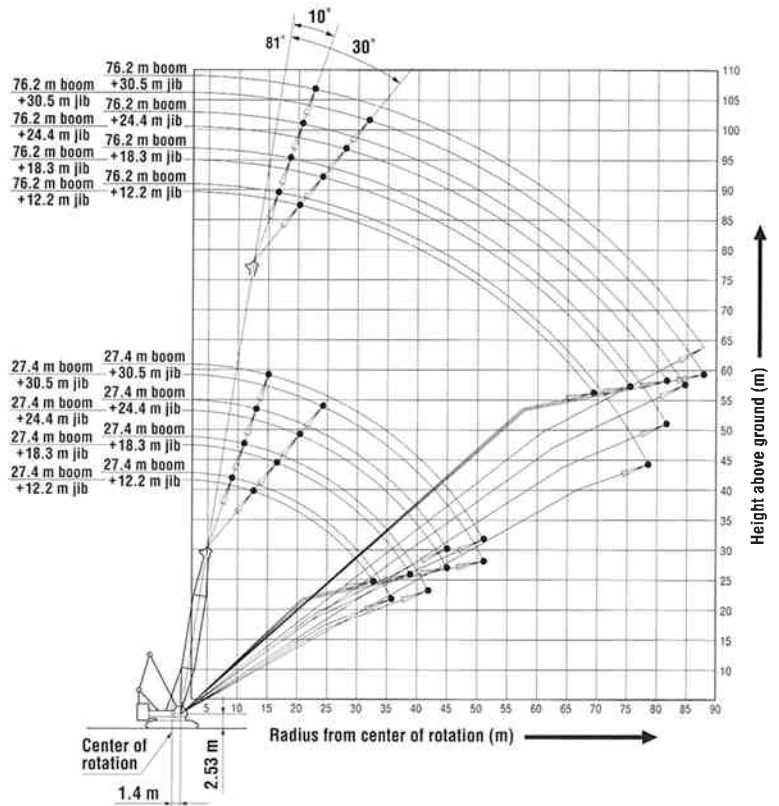


LUFFING JIB

Boom Angle: 88°

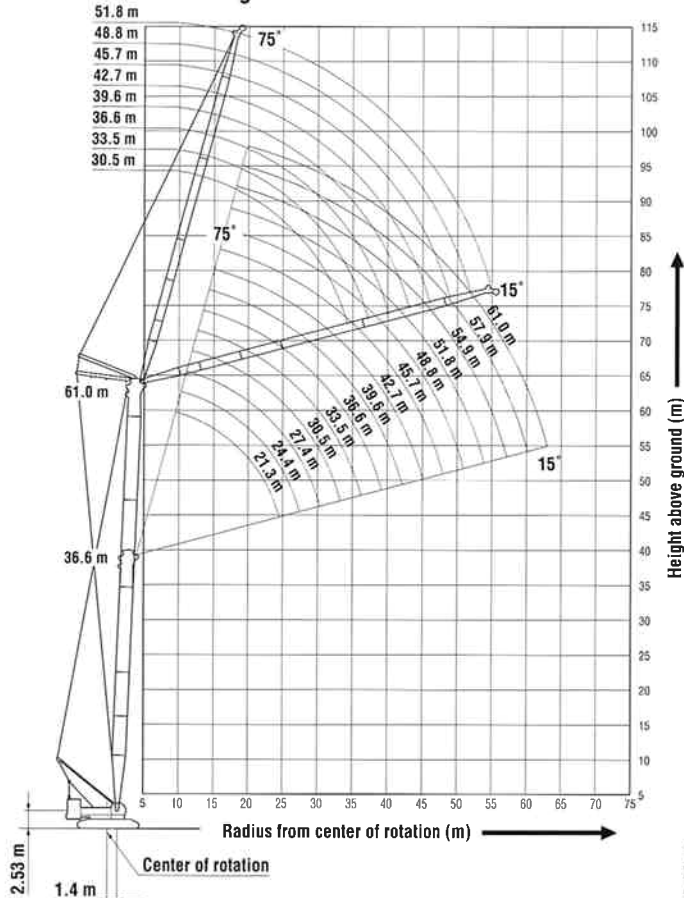

Boom Angle: 63°

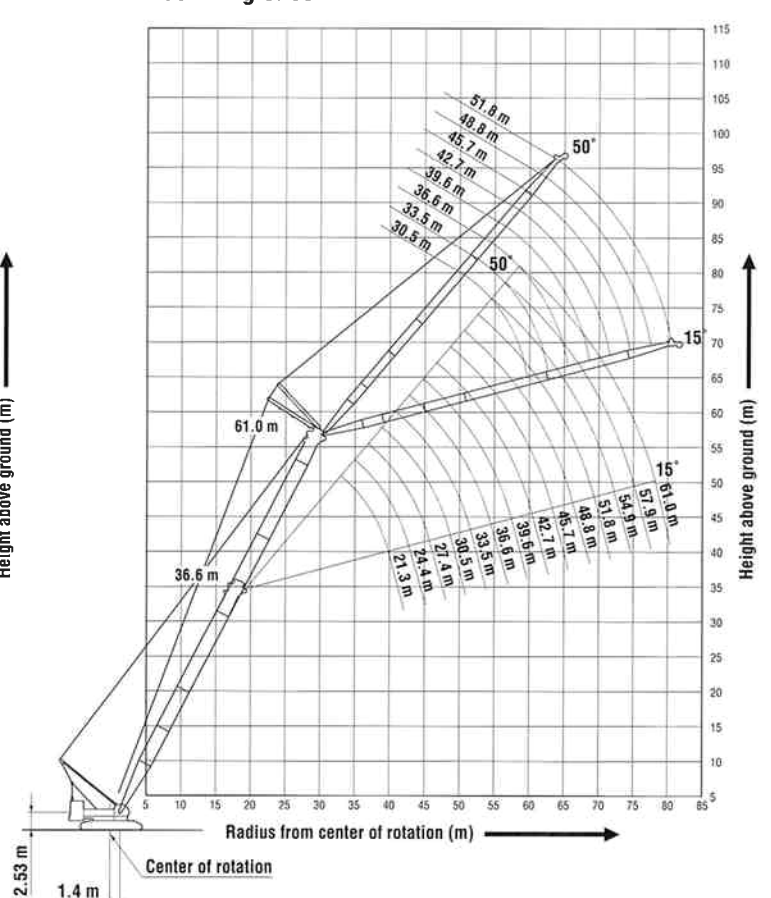


SPECIFICATIONS OF PARTS AND ATTACHMENTS

Dimensions: mm Weight: kg


Base Machine

Weight: 44,900 kg Width: 3,500 mm




Crawler

Weight: 23,500 kg

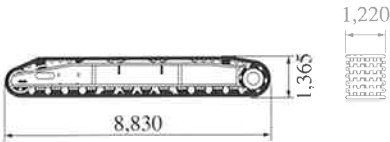


Gantry

Weight: 2,920 kg




Mast

Weight: 2,970 kg

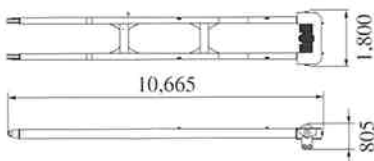

Carbodyweight A

Weight: 4,375 kg x 2 pieces



Carbodyweight B


Weight: 5,625 kg x 2 pieces



Counterweight Type 1


Counterweight A

Weight: 12,500 kg

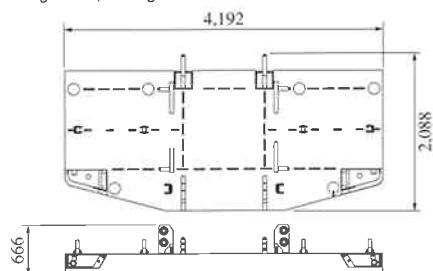


Counterweight B, C

Weight: 5,625 kg x 6 x 2 pieces




Boom Base

Weight: 3,250 kg




Boom Top

Weight: 3,138 kg (with guy cables)



Insert Boom




	L (mm)	Weight (kg)*
	3.0m	3,175
	6.1m	6,223
	12.2m	12,320

*with guy cables

Jib Base with Strut (For Crane)


Weight: 510 kg Width: 1,040 mm



Counterweight Type 2


Counterweight A

Weight: 12,506 kg

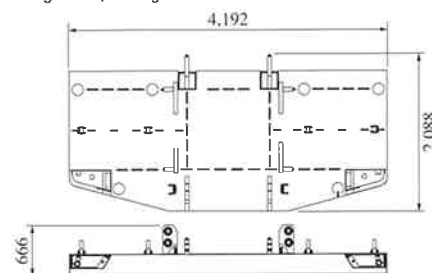


Counterweight B, C

Weight: 10,000 kg x 3 x 2 pieces




Counterweight D, E

Weight: 3,750 kg x 2 pieces




Jib Top (For Crane)

Weight: 315 kg

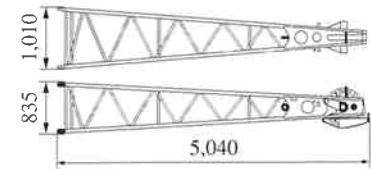


Travel Kit Assembly

Weight: 6,000 kg

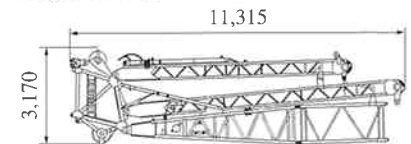


Luffing Main Boom Top

Weight: 1,890 kg




Luffing Taper Insert Boom

Weight: 1,030 kg




Luffing Jib Base

Weight: 1,140 kg

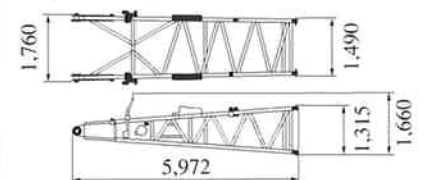


Luffing Jib Top

Weight: 1,170 kg




Front Strut (Luffing Jib)

Weight: 1,160 kg

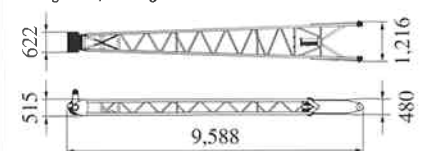








Rear Strut (Luffing Jib)

Weight: 1,130 kg

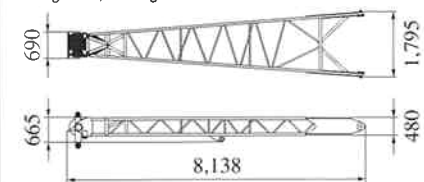

TRANSPORTATION PLAN

(Main Boom 61.0 m + Luffing Jib 51.8 m, Counterweight: Type 1)

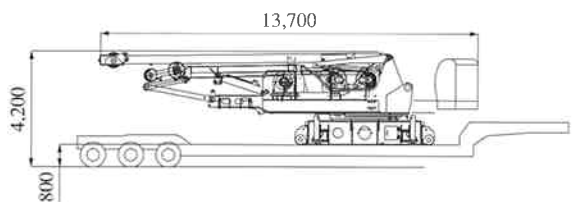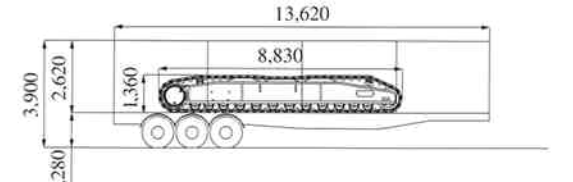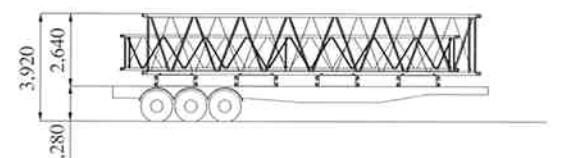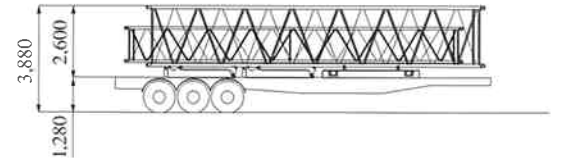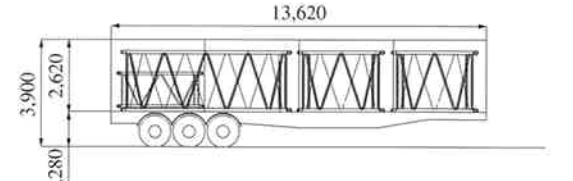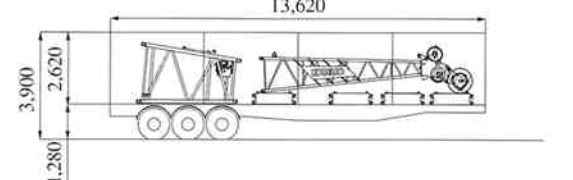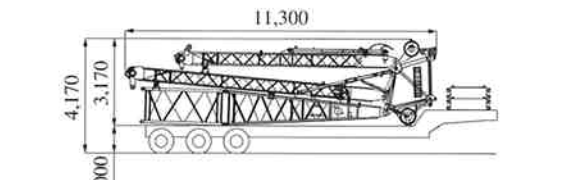Configuration	Description	Total Weight
<p>No.1 Low Loader</p> 	<p>Base Machine = Including 3rd winch Translifter All wire ropes</p>	44.90 ton
<p>No.2 & No.3 Tent Side Truck</p> 	Crawler =	23.50 ton
<p>No.4 & No.5 Flat Bed Trailer</p> 	<p>Counterweight (4 x 5.63 ton) = 40 ft Main Boom x 1 = 40 ft Luffing Jib x 1 = Total =</p>	<p>22.52 ton 2.24 ton 0.96 ton 25.72 ton</p>
<p>No.6 Flat Bed Trailer</p> 	<p>Counterweight A x 1 = 40 ft Main Boom x 1 = 20 ft Luffing Jib (2 x 0.54 ton) = Carbodyweight A (2 x 4.38 ton) = Total =</p>	<p>12.89 ton 2.24 ton 1.08 ton 8.76 ton 24.97 ton</p>
<p>No.7 Tent Side Truck</p> 	<p>10 ft Main Boom (2 x 0.74 ton) = 20 ft Main Boom x 1 = 10 ft Luffing Jib Insert x 1 = Total =</p>	<p>1.48 ton 1.29 ton 0.31 ton 3.08 ton</p>
<p>No.8 Tent Side Truck</p> 	<p>Luffing Jib Top x 1 = Luffing Taper x 1 = Counterweight (4 x 5.63 ton) = Total =</p>	<p>1.17 ton 1.03 ton 22.52 ton 24.72 ton</p>
<p>No.9 Semi Loader</p> 	<p>Travel Kit = Carbodyweight B (2 x 5.63 ton) = Total =</p>	<p>6.00 ton 11.26 ton 17.26 ton</p>

Note: This transport plan depends on your specification of trailer and the areas or countries where you transport.